

PU-8H8CTX

8-Way HDMI HDBaseT™ Transmitter (inc. POE)




USE WITH PU-507RX/PU-507WPRX FOR PoE



The PU-8H8CTX solution offers advanced point-to-point distribution of HDBaseT™ signals up to lengths of 100m over single CAT5e/6/7 cable infrastructure. With the potential for use with any standard 8 HDMI output matrix or distribution amplifier, this solution can work with any matrix/DA to add 8 HDBaseT™ outputs with only a single power supply.

FEATURES

- Supports all v1.4 HDMI resolutions plus 4k.
- Supports uncompressed video/audio up to 10.2Gbps
- Common supported resolutions: HDTV: 480p, 576p, 720p, 1080i, 1080p, 1080p24; PC: VGA, SVGA, XGA, WXGA, SXGA, UXGA, WUXGA.
- HDMI, HDCP 1.1 & DVI compliant
- High Definition Audio supported: Dolby TrueHD and DTS-HD Master Audio plus LPCM with sampling rate up to 192kHz
- Uncompressed data transfer over single CAT cable (100m - CAT6/7; 80m - CAT5e)
- POE as standard for self-powering compatible receiver units
- Compact 1U Rack mount design
- Supports 3D signals

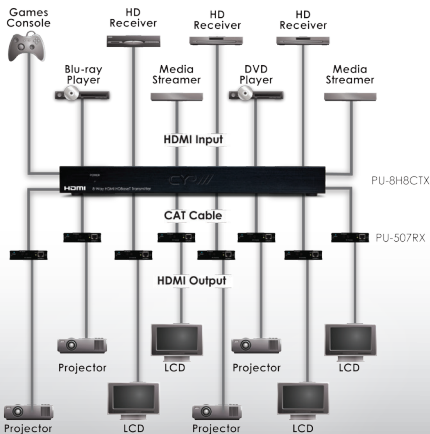

SPECIFICATIONS

| | |
|---------------|---|
| Input: | 8x HDMI (8x HDMI Uncompressed AV and Data) |
| Output: | 8x RJ45 (8x HDBaseT HDMI & Propriety Data) |
| Power: | 24V/6.25A DC (US/EU standards, CE/FCC/UL certified) |
| Dimensions: | 182mm (W) x 434mm (D) x 45mm (H) |
| Gross Weight: | 3960g |
| Net. Weight: | 3550g |
| Packaging: | Boxed |

