


## DVI over Single CAT5e/6/7 HDBaseT™ LITE Extender Kit



The PU-DVI513L-KIT allows DVI signals to be transmitted over a Single CAT5e/6/7 cable to distances of up to 60m. Utilise the USB power output from a TV as an optional way of powering the PU-DVI513L-RX receiver unit alternative to a mains power supply.

### FEATURES

- Complies with the HDBaseT-Lite specifications
- Supports HDMI (including HDCP) over a single CAT5e/6/7 up to 60m (with HDMI to DVI adaptor)
- Full HD resolution support (1080p@60 Hz/36-bit) and PC resolution support (VGA to WUXGA) over CAT5e/6/7 cable
- Choose to power the PU-DVI513L-RX via the USB output from a TV (Cable available separately - APC-USB): \* Please note the performance and consistency of USB power outputs from TV's can vary and cannot be guaranteed by CYP.

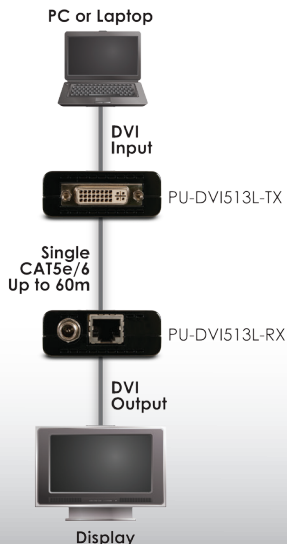

### SPECIFICATIONS

#### PU-DVI513LTX

Inputs	1x DVI-I (1x DVI-I)
Outputs	1x RJ45 (1x DVI & Proprietary Data)
Power:	5V/2.6A US/EU standards, CE/FCC/UL certified)
Dimensions:	54mm (W) x 54mm (D) x 20mm (H)
Net Weight:	60g

#### PU-DVI513LRX

Inputs:	1x RJ45 (1x DVI & Proprietary Data)
Outputs:	1x DVI-I (1x DVI-I)
Power:	5V/2.6A US/EU standards, CE/FCC/UL certified)
Dimensions:	54mm (W) x 54mm (D) x 20mm (H)
Net Weight:	60g
Gross Weight:	792g
Packaging:	Boxed

