


v1.3 HDMI Audio De-embedder (5.1) with built in repeater



The AU-11CD is an advanced solution for repeating HDMI with integrated Audio de-embedding, up to 5.1. Connect the AU-11CD between your source and display via HDMI, and select the audio format required.

FEATURES

- Compliant with v1.3 HDMI, HDCP 1.2 and DVI 1.0
- Supports HDMI Sample Rates up to 192 kHz
- Supports Optical Sample Rate up to 48 kHz
- Supports TMDS clock frequency rate 225MHz
- Supports high-bit-rate (HBR) audio
- Input and Output HDMI cable length can run up to 10m at 1080p 8bit resolution
- Low power consumption
- Support built-in audio EDID switch of LPCM2, 5.1/7.1 or Bitstream
- Supports 3D signals

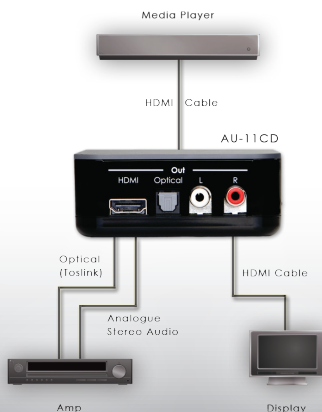

SPECIFICATIONS

Input:	1x HDMI (1x HDMI Uncompressed AV and Data)
Output:	1x HDMI (1x HDMI Uncompressed AV and Data), 1x Toslink (1x Optical DTS / Dolby Digital / 2 Channel LPCM), 2x RCA (1x Analogue Stereo (L/R))
PSU:	5V/1.2A
Dimensions:	90mm (W) x 85mm (D) x 35mm (H)
Gross Weight:	440g
Net. Weight:	260g
Packaging:	Retail Packaged

