


## RS-232 Control Over CAT5/6 Extender Set



The CAT5/6 RS-232 extender is a hardware-based solution providing control of any RS-232 protocol device. This transmitter and receiver set will extend the control of RS-232 for over 250 meters. The RS-232 extender also provides full duplex transmission and hardware handshake signals, with no need for any set up or configuration.

### FEATURES

- Extends any RS-232 compliant device up to 250 metres from the source to display
- Requires only one CAT5/6 cable
- Perfect for digital signage applications
- Baud Rate: 110~921600. Data bit: 8bit
- Simple installation and operation

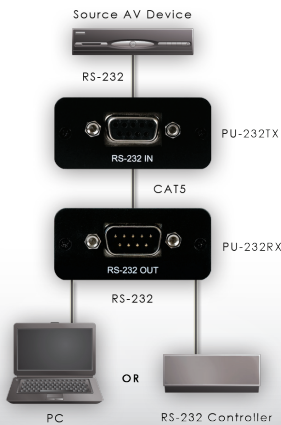

### SPECIFICATIONS

#### PU-232TX

Inputs: 1x 9pin Dsub (1x RS-232 Data)  
Outputs: 1x RJ45 (1x RS-232 Propriety Data)

Power: 5V/1.2A DC (US/EU standards, CE/FCC/UL certified)

Dimensions: 50mm (W) x 70mm (D) x 25mm (H)

Net Weight: 560g

#### PU-232RX

Inputs: 1x RJ45 (1x RS-232 Propriety Data)  
Outputs: 1x 9pin Dsub (1x RS-232 Data)

Power: 5V/1.2A DC (US/EU standards, CE/FCC/UL certified)

Dimensions: 50mm (W) x 70mm (D) x 25mm (H)

Net Weight: 1060g

Gross Weight: 2060g

Packaging: Boxed

